


PRODUCT LEAFLET





Addressable manual call point with isolator 4433

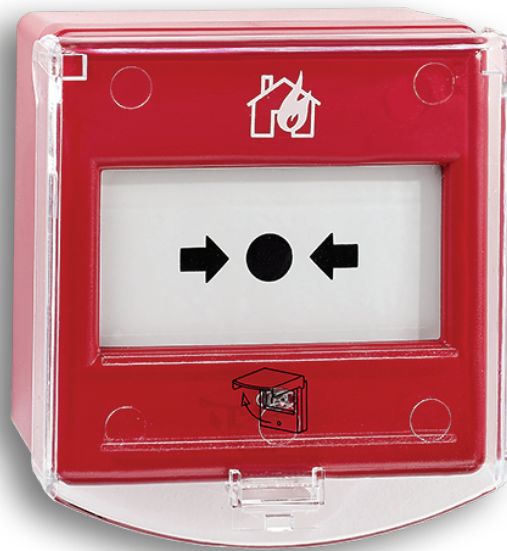

FEATURES

- Polycarbonate flap to protect against accidental operation
- For flush mounting or surface mounting
- Built-in short-circuit isolator
- Configurable polling LED on the front

DATA

-  - 10 to +50 °C
-  < 90%
-  87x87x60 mm
-  201g

GENERAL

- Tested and approved according to EN54-11 and EN54-17
- Vds Approval: G 213004
- CPD: 0786-CPD-21235

RELATED PRODUCTS

- 2347 - Replacement glass (10 pcs)
- 2348 - Replacement polycarbonate flap (10 pcs)