


PRODUCT LEAFLET






2 voltage outputs board 4464

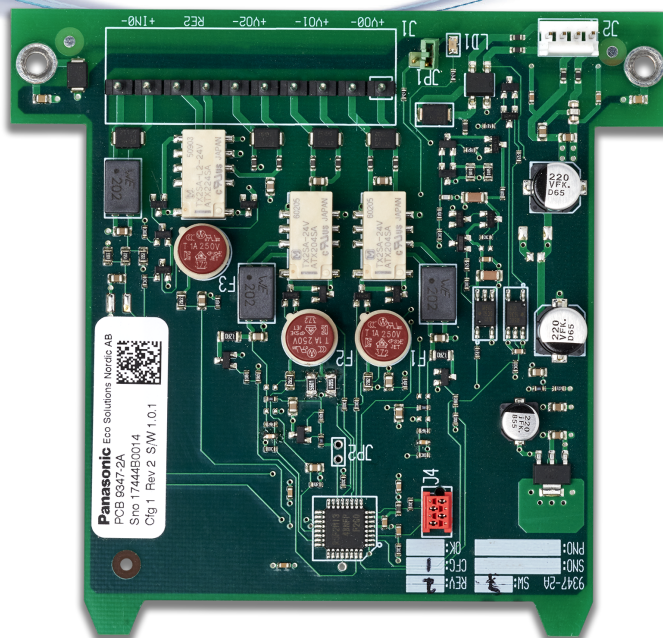

FEATURES

- Mounted as an expansion board inside 4466
- Supports auto-addressing
- Two monitored voltage outputs (2 A)
- One special output intended for fire door closing
- One generic input

DATA

-  24 V DC, via 4466
-  - 5 to +40 °C
-  < 95%
-  108x114x15 mm
-  59 g

GENERAL

- Tested and approved according to EN54-18
- VdS approval: G219025
- CPR: 0786-CPR-21627

RELATED PRODUCTS

- 4466 - External power supply
- 4472 - End of line device
- 4585 - COM-loop repeater